


Novaflex T-Lok 304

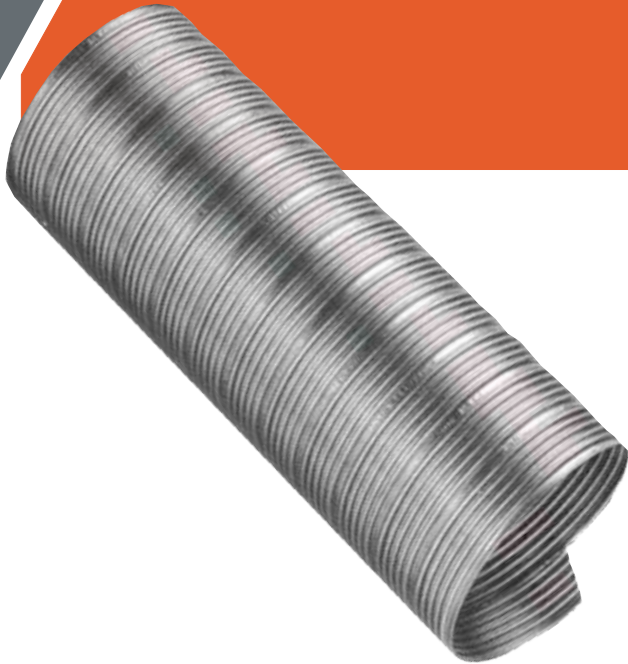

High Temperature Fume Control Service

T-Lok 304

An economical stainless steel tubing designed to handle a broad range of industrial uses

Applications

Elevated temperature
Fume Control

Construction

Material	Stainless Steel 304 Alloy
Construction	Triple mechanical lock
Size	2" to 24" I.D. Larger sizes available = 1.5 x I.D.
Bend Radius	10ft. Longer length, consult factory
Standard Length	6" I.D. = .750 lbs/ft
Weight	
Temperature Range	-60°F to +1250°F

Due to continuous improvements, technical data subject to change without notice.

ver 03.2006

Indianapolis, IN	Tel 317.334.1444	Fax 317.334.1535	800.526.6288
Haw River, NC	Tel 336.578.2161	Fax 336-578.5554	800.334.4270
Berlin, NJ	Tel 856.768.2275	Fax 856.768.2385	800.225.0215
Ajax, ON	Tel 905.686.5200	Fax 905.686.8349	

THE
NOVAFLEX[®]
GROUP 

Email: sales@novaflex.com

Website: www.novaflex.com