

## Abrasion Resistant Urethane Hose Ideal for use with woodworking equipment

### Urethane Vacuum Soft Cuffs

Integral soft cuffs will not separate from hose. An economical alternative to cumbersome rubber hose. Polyurethane wall for superior abrasion resistance.

U.V. stabilized for outdoor use. Lightweight, good flexibility and smooth interior for optimum flow.

**Uses:** Woodworking, equipment, mulch and leaf collection equipment; medium duty material handling and plant debris collection.

#### Specifications:

Temperature range: -65°F to +200°F.  
Standard lengths: 25 & 50 ft.  
Standard diameters: 2" to 12"  
Standard color: Blue with blue wear strip  
9SFTPUX\_\_HWSC




### Heavy Duty Urethane Vacuum

Lightweight alternative to heavy walled PVC. Designed specifically for transfer of abrasive materials under vacuum from woodworking equipment. Available with a copper static wire for safe grounding.

**Uses:** Medium duty material handling. Debris collection.

#### Specifications:

Temperature range: -65°F to +200°F.  
Standard length: 25 & 50 ft.  
Standard diameters: 2" to 16"  
Standard color: Clear with blue wear strip  
9SFTPUX\_\_FV  
9SFTPUX\_\_FVSW (static wire option)

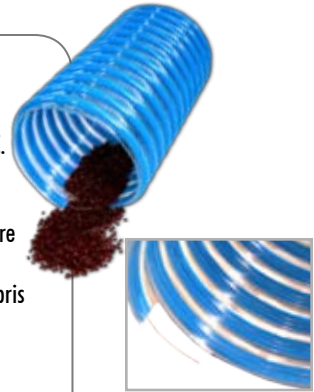

### SFTPUX-HW

Heavy duty urethane material transfer hose. Designed for use with negative pressure equipment. 0.045" wall gauge. Rigid external scuff guard for ease of handling.

**Uses:** Medium duty material handling. Debris collection.

#### Product Specifications

Temperature range: -65° to +200°F  
Standard length: 25 ft & 50 ft  
Standard diameters: 2" to 12"  
Standard color: Blue with blue wear strip  
9SFTPUX\_\_HW



### SFTPUW-HW

Medium duty all urethane construction with encapsulated wire for additional strength. 0.045" wall gauge.

Polyurethane wall for superior abrasion resistance. UV stabilized for outdoor use. Lightweight. Good flexibility. Smooth interior for optimum flow.

**Uses:** Medium duty material handling. Debris collection.

#### Product Specifications

Temperature range: -65° to +200°F  
Standard length: 25 ft & 50 ft  
Standard diameters: 2" to 12" (Larger sizes available upon request)  
Compression ratio: 2:1  
Standard color: Blue with blue wear strip  
9SFTPUW\_\_HW



Berlin, NJ  
Indianapolis, IN  
Haw River, NC  
Whitby, ON

Tel 856.768.2275  
Tel 317.334.1444  
Tel 336.578.2161  
Tel 905.666.4970

Fax 856.766.2385  
Fax 317.334.1535  
Fax 336-578.5554  
Fax 905.666-9388

800.225.0215  
800.526.6288  
800.334.4270

THE  
**NOVAFLEX**  
GROUP  
Email: [sales@novaflex.com](mailto:sales@novaflex.com)  
Website: [www.novaflex.com](http://www.novaflex.com)