


NovaFlex Urethane Vacuum Hose

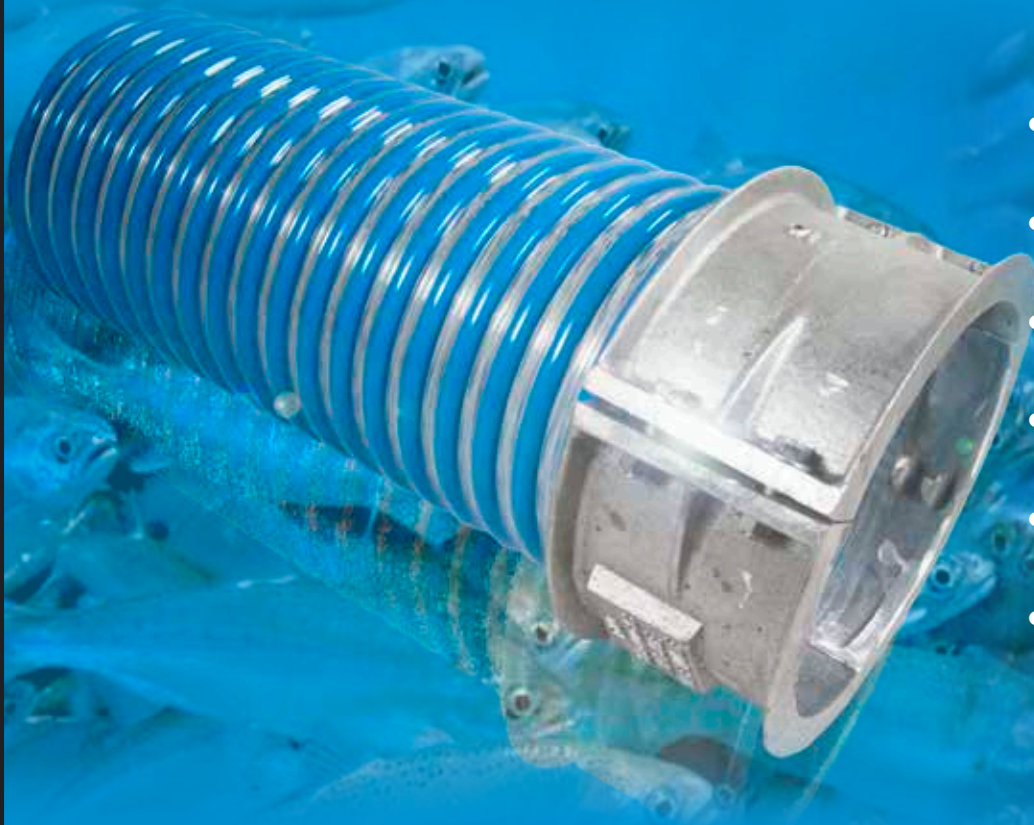

- Lightweight alternative to heavy walled PVC
- Polyurethane wall for abrasion resistance
- All weather construction, resistant to ozone attack
- Smooth inner tube for maximum product flow
- External wear strip prevents damage from abrasion
- Resistant to salt for under water applications

Designed specifically for transfer of abrasive materials under vacuum from storage tanks barges and tankers, including underwater applications in aquaculture; hatchery, pen transfer, stream release. Heavy duty construction for full vacuum.

Style	I.D.	O.D.	Bend Radius	Neg pressure (Inch Hg)	Pos.W.P PSI	Pitch	Wall Gauge (thou")	Weight lbs/ft
SFTPUX04FV	4"	4.45"	9.5"	25"	35	.75"	0.07	1.66
SFTPUX06FV	6"	6.65"	14"	25"	30	.75"	0.07	2.5
SFTPUX08FV	8"	8.85"	14"	25"	30	1.00"	0.085	3.4

• Temperature range -50°F to +200°F • Rated for full vacuum • (Larger sizes available upon request)



Ajax ON Tel 905.686.5200 Fax 905.686.8349
 Email: sales@novaflex.com Website: www.novaflex.com

Distributed by:

All products are warranted to be free from all defects in material and workmanship. It is impossible to test all products under all conditions to which they might be subjected in the field. It is therefore the buyer and/or end users' responsibility to test all products under the conditions that duplicate the service conditions prior to installation. All improvements, all specifications are subject to change without prior notice. It is the buyer and/or end users' responsibility to review our complete **Terms and Conditions of Sale** located on our web sites at: www.novaflex.com / www.z-flex.com / www.flexmaster.com.